


Single Core PVC Insulated Power Cable

Part # : 6001

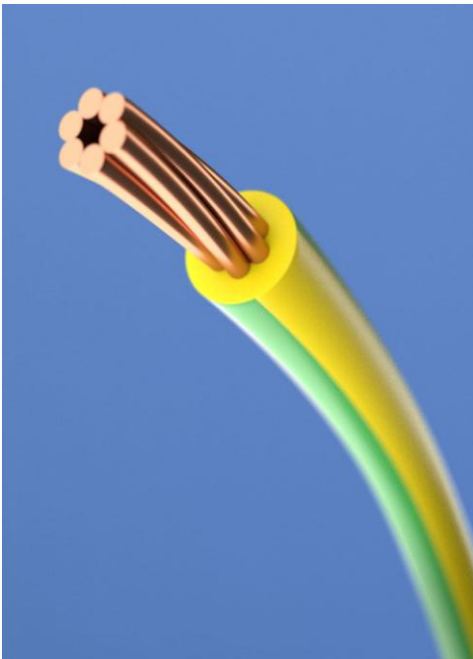

CONSTRUCTION				
Part #	Nominal Conductor Area (mm²)	Nominal Conductor Stranding (#/mm)	Insulation Thickness (mm)	Maximum O/D (mm)
6001.5	0.5	16/0.2	0.6	2.5
6001.75	0.75	24/0.2	0.6	2.7
60011.0	1.0	32/0.2	0.6	2.8
60011.5	1.5	30/0.25	0.7	3.4
60012.5	2.5	50/0.25	0.8	4.1
60014.0	4.0	56/0.3	0.8	4.8
60016.0	6.0	84/0.3	0.8	5.3
600110.0	10	80/0.4	1.0	6.8
600116.0	16	126/0.4	1.0	8.1
600125.0	25	196/0.4	1.2	10.2
600135.0	35	276/0.4	1.2	11.7
600150.0	50	396/0.4	1.4	13.9
600170.0	70	360/0.5	1.4	16.0
600195.0	95	475/0.5	1.6	18.2
6001120.0	120	608/0.5	1.6	20.2
6001150.0	150	765/0.05	1.8	22.5
6001185.0	185	925/0.5	2.0	24.9
6001240.0	240	1221/0.5	2.2	28.4
Conductor Type	Stranded			
Conductor Material	Plain Annealed Copper			
Insulation Material	PVC			
Inulation Color	White, Black, Red, Grey, Blue, Green/ Yellow			
Temprature Rating	70°C			
Voltage Rating	300/500V, 450/750V			

Features:

- Plain Annealed Copper Conductor
- Stranded Conductor
- PVC Insulated
- High Flexible Sheath
- 450/750 Voltage
- 70°C Temperature
- Packaging 90 Meters

Design:

