


TELEPHONE PVC CABLE

30 Pairs Telephone PVC Cable

Part # : 3030

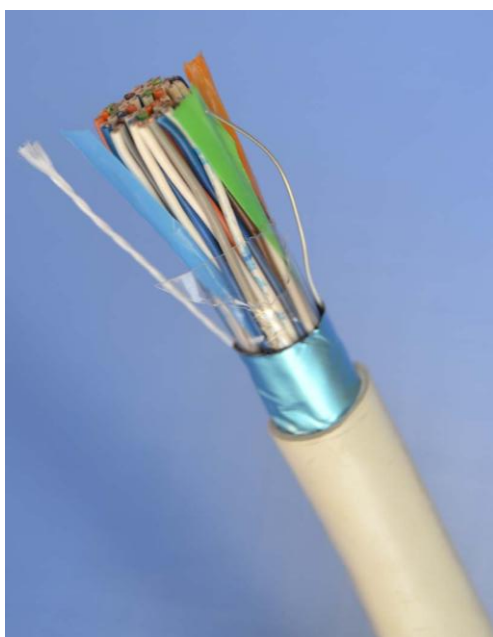

Features:

- Copper 22AWG (0.6mm)
- 24 AWG Drain Wire (0.4mm)
- Two Twisted Wires
- Packaging 500 or 1000 Meters
- Nylon Rip Cord
- No Cross Talk
- All Pairs Can Be Used Simultaneously
- Aluminium Foil Wrapped
- Mylar Protection

CONSTRUCTION	
Conductor:	
Nos.	60
Dia (mm)	0.6
A. Q. L	(+0.001/-0.010)
Material	Solid Bare Copper
Insulation:	
Nos.	60
Dia (mm)	1.0
A. Q. L	(+/-0.10)
Material	General PVC Insulation
Shield (1):	
Material	Spiral PP Color Tape (Spiraled Each 10 Pairs)
Shield (2):	
Material	Spiral Mylar Transparent Shield
Drain Wire:	
Nos.	01
Dia (mm)	0.4
A. Q. L	(+0.001/-0.008)
Material	Solid Bare Copper
Shield (3):	
Material	Spiral Aluminium Foil Shield
Sheath:	
Dia (mm)	11.1
A. Q. L	(+/-0.20)
Material	Grey PVC jacket with Rip-Cord
CHARACTERISTICS	
Conductor Resistance	20°C, Conductor DC Resistance
	< 7.31 OHMS/100M
Insulation Resistance	20°C, Insulation Resistance
	> 200 MΩ.M
Rated Temperature	60 °C
Rated Voltage	30 V

Design:

