


02 Core Armoured XLPE Insulated Power Cable

Part # : 6402

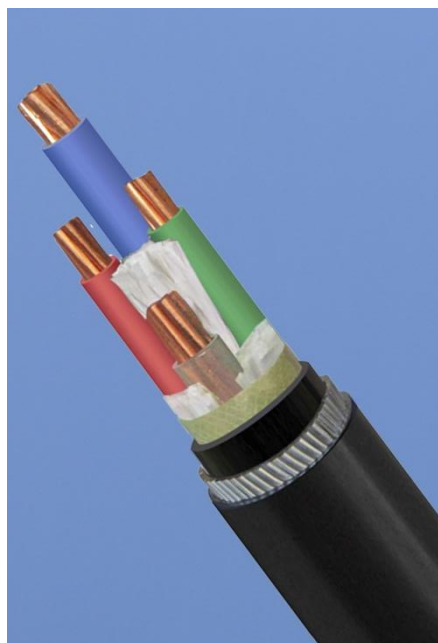

Features:

- Plain Annealed Copper Conductor
- Stranded Conductor
- 0.6 mm Conductor
- XLPE Insulated
- CU/XLPE/PVC/AWA/PVC
- Galvanized Steel Wire over the PVC Bedding
- Black Sheath
- Packaging 500 or 1000 Meters

CONSTRUCTION					
Part #	Nominal Cross Section Area (mm ²)	Nominal Thickness of Insulation (mm)	Nominal Diameter of Steel Wire (mm)	Nominal Thickness of Sheath (mm)	Overall Diameter (mm)
64021.5	1.5	0.7	0.9	1.8	13.5
64022.5	2.5	0.7	0.9	1.8	14.3
64024.0	4.0	0.7	0.9	1.8	15.4
64026.0	6.0	0.7	0.9	1.8	16.5
640210	10	0.7	1.25	1.8	19.1
640216	16	0.7	1.25	1.8	21.0
640225	25	0.9	1.6	1.8	25.0
640235	35	0.9	1.6	1.8	27.3
640250	50	1.0	1.6	1.8	26.1
640270	70	1.1	1.6	2.0	29.5
640295	95	1.1	2.0	2.1	33.6
6402120	120	1.2	2.0	2.2	36.5
6402150	150	1.4	2.0	2.3	39.7
6402185	185	1.6	2.5	2.5	46
6402240	240	1.7	2.5	2.7	50.5
6402300	300	1.8	2.5	2.8	54.9
6402400	400	2.0	2.5	3.1	60.6
Conductor Type		Stranded			
Conductor Material		Plain Annealed Copper			
Insulation Material		XLPE			
Insulation Color		Red, Black			
Temperature Rating		90°C			
Voltage Rating		1.2 KV			

Design:

