


02 Core Unarmoured XLPE Insulated Power Cable

Part # : 6302

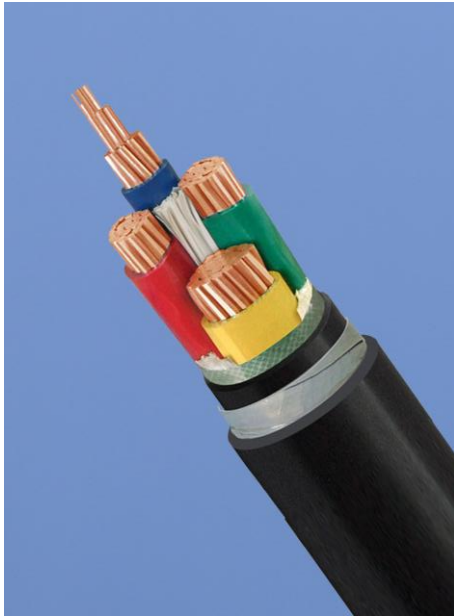

CONSTRUCTION				
Part #	Nominal Cross Section Area (mm²)	Nominal Thickness of Insulation (mm)	Nominal Thickness of Sheath (mm)	Overall Diameter (mm)
63021.5	1.5	0.7	1.8	9.7
63022.5	2.5	0.7	1.8	10.5
63024.0	4.0	0.7	1.8	11.6
63026.0	6.0	0.7	1.8	12.7
630210	10	0.7	1.8	14.6
630216	16	0.7	1.8	16.5
630225	25	0.9	1.8	19.4
630235	35	0.9	1.8	21.7
630250	50	1.0	1.8	20.9
630270	70	1.1	1.8	23.9
630295	95	1.1	1.9	26.8
6302120	120	1.2	2.0	29.7
6302150	150	1.4	2.2	33.1
6302185	185	1.6	2.3	36.8
6302240	240	1.7	2.5	41.3
6302300	300	1.8	2.6	45.3
6302400	400	2.0	2.9	51.0
Conductor Type	Stranded			
Conductor Material	Plain Annealed Copper			
Insulation Material	XLPE			
Insulation Color	Red, Black			
Temperature Rating	90°C			
Voltage Rating	1.2 KV			

Features:

- Plain Annealed Copper Conductor
- Stranded Conductor
- 0.6 mm Conductor
- XLPE Insulated
- CU/XLPE/PVC
- Binder Tape
- Black Sheath
- Packaging 500 or 1000 Meters

Design:

