


04 Core Armoured XLPE Insulated Power Cable

Part # : 6404

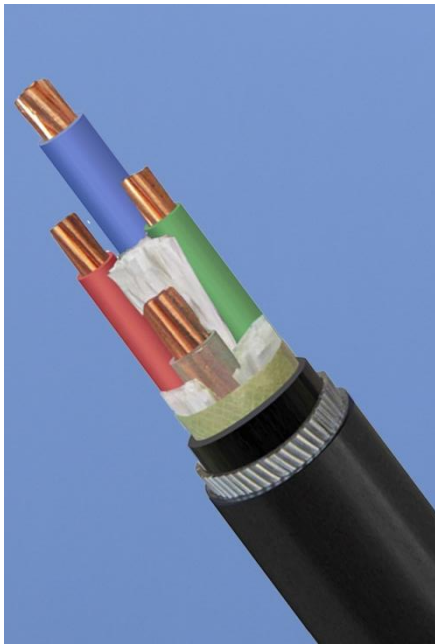

CONSTRUCTION					
Part #	Nominal Cross Section Area (mm ²)	Nominal Thickness of Insulation (mm)	Nominal Diameter of Steel Wire (mm)	Nominal Thickness of Sheath (mm)	Overall Diameter (mm)
64041.5	1.5	0.7	0.9	1.8	14.7
64042.5	2.5	0.7	0.9	1.8	15.7
64044.0	4.0	0.7	0.9	1.8	17.0
64046.0	6.0	0.7	1.25	1.8	19.1
640410	10	0.7	1.25	1.8	21.4
640416	16	0.7	1.6	1.8	24.2
640425	25	0.9	1.6	1.8	28.2
640435	35	0.9	1.6	1.9	31.2
640450	50	1.0	1.6	2.0	32.7
640470	70	1.1	2.0	2.2	38.4
640495	95	1.1	2.0	2.3	42.5
6404120	120	1.2	2.5	2.5	49.0
6404150	150	1.4	2.5	2.6	53.3
6404185	185	1.6	2.5	2.8	58.5
6404240	240	1.7	2.5	3.0	65.0
6404300	300	1.8	2.5	3.2	70.9
6404400	400	2.0	3.15	3.5	80.2
Conductor Type	Stranded				
Conductor Material	Plain Annealed Copper				
Insulation Material	XLPE				
Insulation Color	Red, Yellow, Blue & Black				
Temperature Rating	90°C				
Voltage Rating	1.2 KV				

Features:

- Plain Annealed Copper Conductor
- Stranded Conductor
- 0.6 mm Conductor
- XLPE Insulated
- CU/XLPE/PVC/AWA/PVC
- Galvanized Steel Wire over the PVC Bedding
- Black Sheath
- Packaging 500 or 1000 Meters

Design:

