


05 Core PVC Flexible Power Cable

Part # : 6105

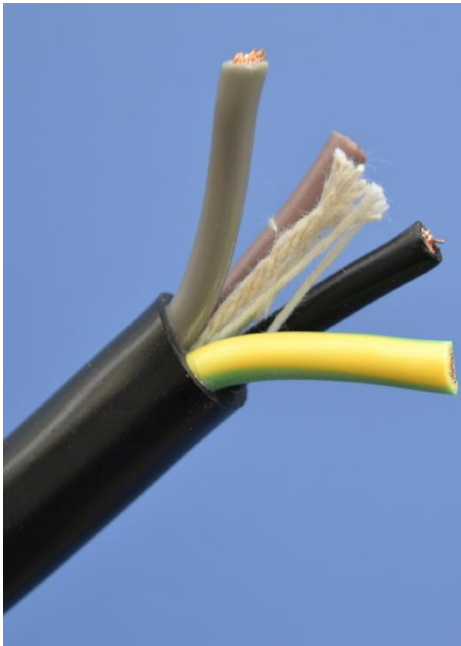

CONSTRUCTION					
Part #	Nominal Conductor Area (mm ²)	Nominal Conductor Stranding (#/mm)	Insulation Thickness (mm)	Min. Overall Dia (mm)	Max. Overall Dia (mm)
6105.75	0.75	24/0.20	0.6	7.4	9.3
61051.0	1.0	32/0.20	0.6	7.8	9.8
61051.5	1.5	30/0.25	0.7	9.3	11.6
61052.5	2.5	50/0.25	0.8	11.2	13.9
61054.0	4.0	56/0.30	0.8	13.0	16.1
Conductor Type		Stranded			
Conductor Material		Plain Annealed Copper			
Insulation Material		PVC			
Inulation Color		Green/Yellow, Brown, Black, Grey, Blue			
Sheath Material		PVC			
Sheath Color		Black			
Temprature Rating		70°C			
Voltage Rating		300/500V			

Features:

- Plain Annealed Copper Conductor
- Stranded Conductor
- PVC Insulated
- High Flexible Sheath
- CU/PVC/PVC
- Black Sheath
- Packaging 90 Meters

Design:

