


POWER CABLE

05 Core Unarmoured XLPE Insulated Power Cable

Part # : 6305

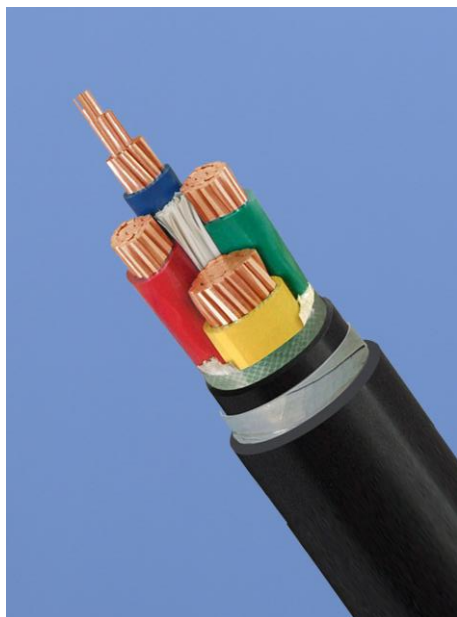

CONSTRUCTION

Part #	Nominal Cross Section Area (mm ²)	Nominal Thickness of Insulation (mm)	Nominal Thickness of Sheath (mm)	Overall Diameter (mm)
63051.5	1.5	0.7	1.8	11.8
63052.5	2.5	0.7	1.8	12.9
63054.0	4.0	0.7	1.8	14.4
63056.0	6.0	0.7	1.8	15.9
630510	10	0.7	1.8	18.4
630516	16	0.7	1.8	20.8
630525	25	0.9	1.8	25.2
630535	35	0.9	1.8	28.4
630550	50	1.0	1.9	32.3
630570	70	1.1	2.1	37.8
630595	95	1.1	2.2	42.8
Conductor Type		Stranded		
Conductor Material		Plain Annealed Copper		
Insulation Material		XLPE		
Inulation Color		Red, Yellow, Blue, Black & Green/Yellow		
Temprature Rating		90°C		
Voltage Rating		1.2 KV		

Features:

- Plain Annealed Copper Conductor
- Stranded Conductor
- 0.6 mm Conductor
- XLPE Insulated
- CU/XLPE/PVC
- Binder Tape
- Black Sheath
- Packaging 500 or 1000 Meters

Design:

